

LED exterior light/emergency light 143 538_08

The aluminium housing has on the front side a LED-carrier. The carrier is molded in the housing and therefore protected against weather. On the backside is the cable junction, which could be customized.

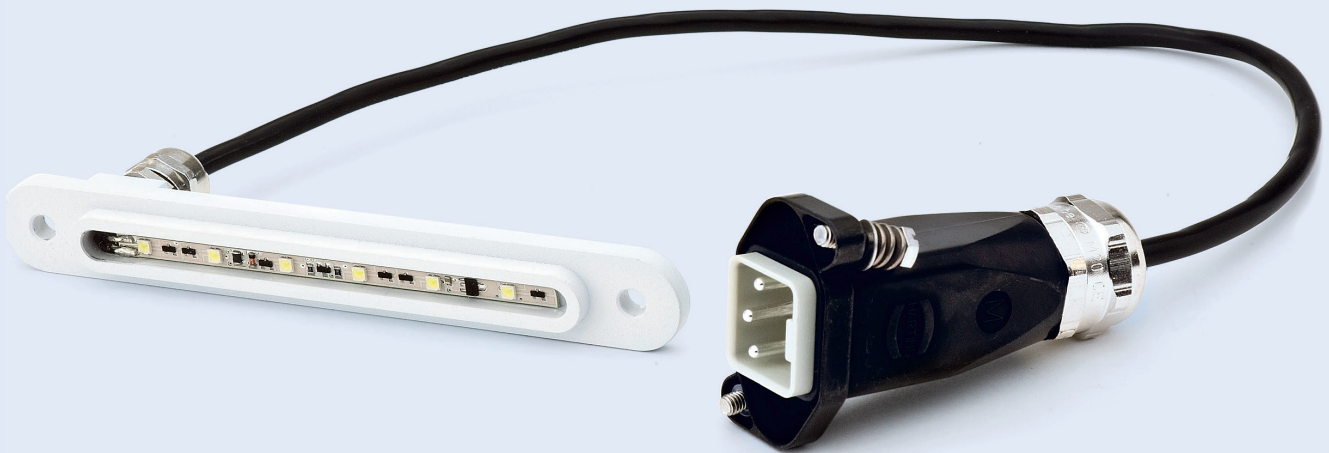


Image: LED exterior light/emergency light 143 538_08 with Harting plug in

References

- RU 300
- Velaro D



State: September 2010
 Technical subject to change without notice.

Technical parameters

LED exterior light/emergency light	Order no.:	143 538_08
---	-------------------	-------------------

Technical parameters	
Design:	aluminium housing with LED carriers, casted

Other technical data	
Nominal voltage:	24 V DC
Current consumption:	0,03 A
Ambient temperature:	-25 °C bis +55 °C
Dimensions:	length/width/height 150/20/50 mm
Light emission:	length/width 105/7 mm
Degree of protection:	IP 54
Tests:	DIN EN 50155

Other nominal voltages available on request.