

# Constant current supply for LED-modules A 80 250 700


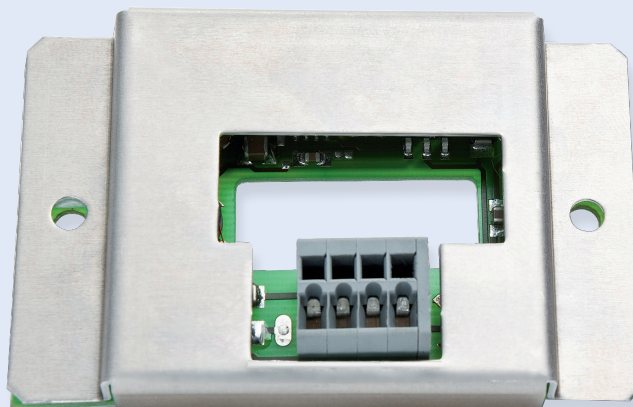


Image: Constant current supply for LED-modules A 80 250 700

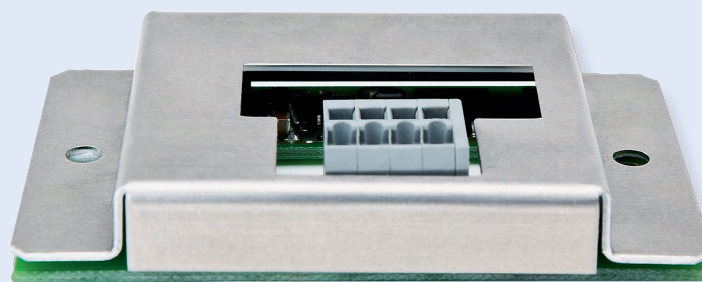

The electronic direct current source is constructed with a highly efficiency switching converter. Output current regulated over very wide input voltage range.

## Technical parameters

**Constant current supply for LED-modules** Order no.: **A 80 250 700**

### Technical parameters

Design: aluminium casing,  
for mounting in a special carrier profile

### Other technical data

Nominal voltage:	24 V DC
Input voltage range:	16,8 - 32 V DC
Current consumption:	0,13 A
Output current:	700 mA, regulated
Ambient temperature:	-25 °C to +55 °C
Dimensions:	length/width/height 75/49/16 mm
Tests:	EN 50155
	EN 50121-3-2
Connector:	WAGO 739, cage clamp

**Other nominal voltages available on request.**