

Ceiling fitting light 143 380 0x



Image: Ceiling fitting light 143 380
front view

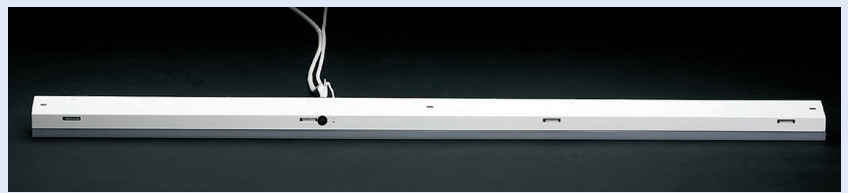


Image: Ceiling fitting light 143 380
back view

The aluminium sheet lamp casing will be powder-coated and contains the entire electrical installation. According to the respective version, an electronic ballast (18-36 W DC) will be provided. The opal polycarbonate cover will be clipped into the casing.

References

- Local train NINA, Switzerland



Source: Hp. Teuchmann

State: September 2008
Technical subject to change without notice.

Technical parameters

Ceiling fitting light

Technical parameters

Design: powder-coated aluminium sheet casing,
polycarbonate cover, opal

Other technical data

Dimensions: length/width/height 1312/109/53,7 mm
length/width/height 1790/109/53,7 mm
Fire protection: DIN 5510
Degree of protection: IP 20

Light bulbs

(Not included in the scope of delivery!)

Fluorescent lamp T8, 36 W

Lamp operating device

Electronic ballast 24 V DC / 36 W
Electronic ballast 110 V DC / 36 W

Length	Electronic ballast included	Order no.
1312 mm	no	143 380 00
1790 mm	no	143 380 01
1312 mm	yes	143 380 02