

# Ceiling fitting light P 03 70xx

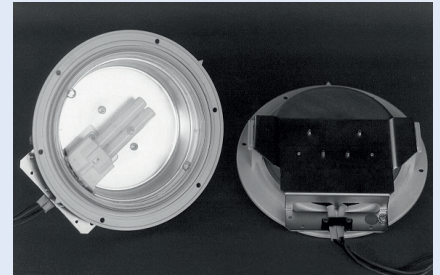


Image: Ceiling fitting light P 03 7048  
1 x 5 W PL Compact fluorescent lamp


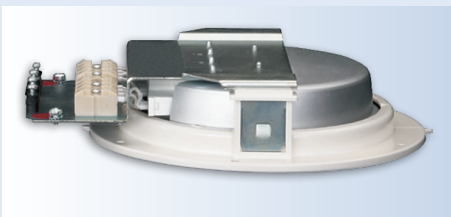


Image: Ceiling fitting light P 03 7048 or P 03 7049  
height 51 mm

In an aluminium reflector with integrated light bulb socket are a lamp body (straight, RAL 9010) and a polycarbonate cover pane combined. The socket holder which is clipped to the lamp body on both sides, incorporates the lamp operating device (electronic ballast).

## References

- ICE 3

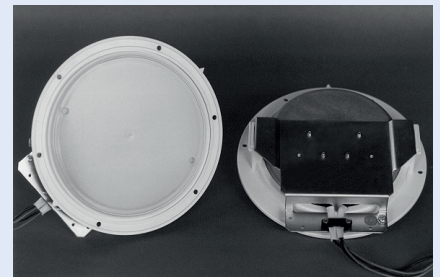

State: September 2008  
Technical subject to change without notice.

## Technical parameters

### Ceiling fitting light

Order no.:

P 03 70xx

### Technical parameters

Design: polycarbonate lamp body, polycarbonate glass pane  
transparent or opal, aluminium reflector AL99.8 anodised

### Other technical data

Dimensions: Ø 195/165 mm, height 51 mm  
Ceiling drill hole: Ø 165 mm  
Ceiling wall thickness: 3,5 mm  
Light engineering: light distribution curve exists  
Fire protection: DIN 5510-2  
Degree of protection: IP 54

### Light bulbs

Compact fluorescent lamp, 5 W - 7 W

### Lamp operating device

Electronic ballast 24 V DC / 5 W  
Electronic ballast 110 V DC / 5 W