

## Drivers desk-LED lamp 143 565\_050



Image: Drivers desk-LED lamp 143 565\_050  
front view

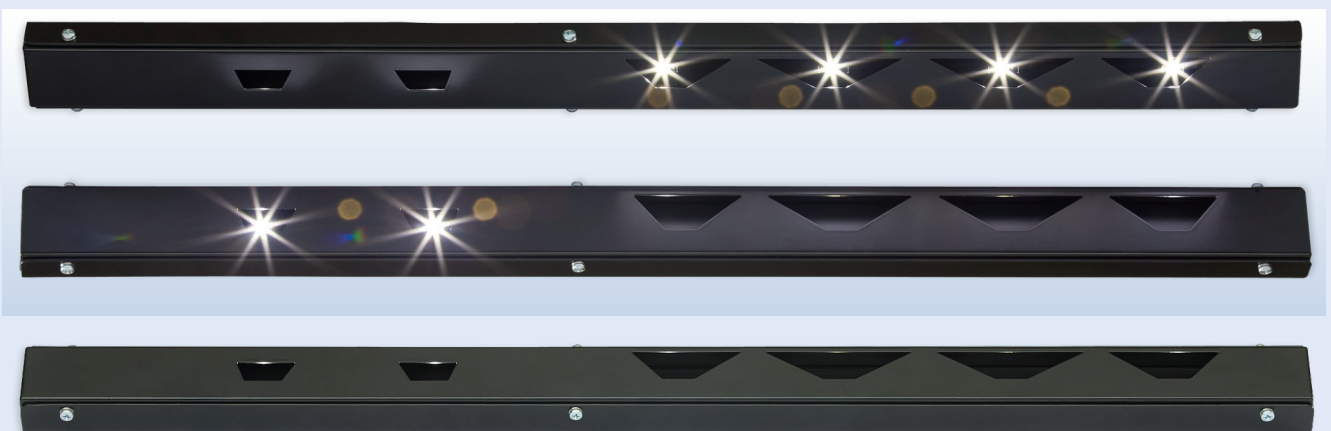


Image: Drivers desk-LED lamp 143 565\_050  
side view

The light is intended to be built under a desk cover, or assembled in a casing. Its low height facilitates the covered installation. The housing is sealed, but the cover only screwed. A higher IP-safety class can be offered.

 References

- RhB
- Do Sto SBB



State: September 2010  
Technical subject to change without notice.

 Technical parameters

**Drivers desk-LED lamp**
**Order no.:**
**143 565\_050**
**Technical parameters**

Design: aluminium housing

**Other technical data**

Nominal voltage:	24 V DC
Input voltage range:	16,8 - 32 V DC
Current consumption:	ca. 0,2 A
Ambient temperature:	-25 °C to +70 °C
Dimensions:	length/width/height 209/40/20 mm
Light emission:	length/width 380/250 mm
Protection type:	IP 20

**Other dimensions available on request.**