

Reading light P 08 602x (DECOSTAR)

Image.: Reading light P 08 6029
with cold light mirror Reflektor 20°




Image.: Reading light P 08 6026
with cold light mirror Reflektor 28°



A casing with different light emitting angles 0° / 10° / 15° / 20° / 28° and 37° will be used for the reading lights. The polycarbonate casing integrates a galvanized socket carrier, a coolbeam seal, a G4 socket and the 12 V light bulb Osram DECOSTAR.

References

- ICE 3 Option
- Do LNVG

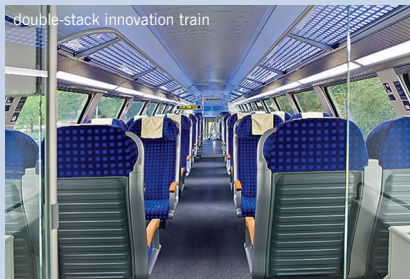

Technical parameters

Reading light

Technical parameters

Design:	polycarbonate casing, socket carrier galvanized
Light axes:	tilt angles 0°, 10°, 15°, 20°, 28° and 37°

Other technical data

Dimensions:	length/width/height 74/48/43,5 mm
Fire protection:	DIN 5510-2
Protection type:	IP 54

Light bulb

Halogen lamp Osram DECOSTAR, 10 W

Lamp operating device

DC converter	24 V DC / 20 W
DC converter	110 V DC / 20 W

Parameter

Parameter	Order no.:	Order no.:
Light axis with tilt angle 0°	P 08 6025	
Light axis with tilt angle 10°	P 08 6027	
Light axis with tilt angle 15°	P 08 6021	
Light axis with tilt angle 20°	P 08 6029	
Light axis with tilt angle 28°	P 08 6026	
Light axis with tilt angle 37°	P 08 6028	

State: September 2008
Technical subject to change without notice.